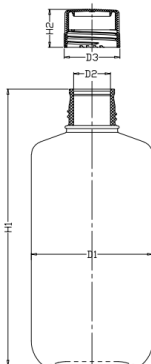


Technical Datasheet

Article - No:	TDS-NMPB125	Revision: A0																						
Remarks	single use only																							
Specification																								
Product name	NMPB125,125ml Packaging Bottle,HDPE																							
Production conditions	Class 100,000 clean room production																							
	No release agent is used																							
Classification	CE/IVDD																							
Dimensions	<div></div>																							
	<table><tr><th>location name</th><th>mate rial</th><th>O.D. D1 (mm)</th><th>Height H1 (mm)</th><th>I.D. D2 (mm)</th><th>Cap O.D. D3 (mm)</th><th>Cap H H2 (mm)</th><th>Total H (mm)</th></tr><tr><td rowspan="2">125ml</td><td>PP</td><td>φ50.4</td><td>97.9</td><td>φ17.5</td><td>φ28.4</td><td>15.1</td><td>99.1</td></tr><tr><td>PE</td><td>φ50.4</td><td>97.9</td><td>φ17.5</td><td>φ28.4</td><td>15.1</td><td>99.1</td></tr></table>		location name	mate rial	O.D. D1 (mm)	Height H1 (mm)	I.D. D2 (mm)	Cap O.D. D3 (mm)	Cap H H2 (mm)	Total H (mm)	125ml	PP	φ50.4	97.9	φ17.5	φ28.4	15.1	99.1	PE	φ50.4	97.9	φ17.5	φ28.4	15.1
location name	mate rial	O.D. D1 (mm)	Height H1 (mm)	I.D. D2 (mm)	Cap O.D. D3 (mm)	Cap H H2 (mm)	Total H (mm)																	
125ml	PP	φ50.4	97.9	φ17.5	φ28.4	15.1	99.1																	
	PE	φ50.4	97.9	φ17.5	φ28.4	15.1	99.1																	
Colour	Clear																							
Nominal Capacity	125ml																							
Material Characteristics	bottle:High Density Polyethylene(HDPE)																							
	cap:polypropylene (PP)																							
Performance parameters	Negative pressure:-70kpa~-90kpa																							
	Ethanol loss rate:≤0.5%																							
	water loss rate:≤0.2%																							
Purity Grade	free of RNase and DNase																							
	free of pyrogen																							
	free of PCR inhibitors																							
	free of human DNA																							
	free of endotoxins																							
Shelf - Life	36 months at controlled storage conditions																							
Packaging	pcs per case:500																							
Storage	dry condition:40%-60% rel. humidity																							
Approved by quality department																								